

## TECHNICAL SPECIFICATIONS

- wicket width: 800-900mm<sup>1</sup>
- wicket height: 2100mm<sup>2</sup>
- opening direction: right/left
- frame material: aluminium profile
- panel material: acrylic glass (plexiglas)
- glazing type: SAN standard (option: SAN HARD<sup>3</sup> or SAN SAVE<sup>4</sup>)

<sup>1</sup>width depending on glazing size<sup>2</sup>dimension depending on door panel height<sup>3</sup>scratch resistant <sup>4</sup>shatter resistant

## WICKETS WITH LOW THRESHOLD = 25MM

800mm  
min

Any arrangement within this range


800mm  
min

## WICKETS WITH HIGH THRESHOLD = 130MM

800mm  
min

Any arrangement within this range

800mm  
min

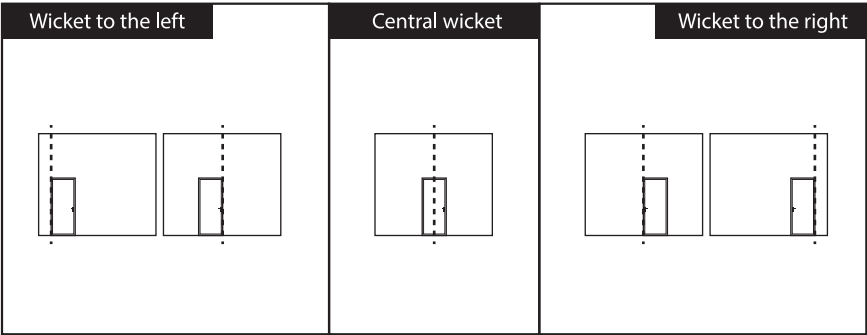


TECHNICAL SPECIFICATIONS

- wicket width: 800-900mm
- wicket height: 2100mm<sup>1</sup>
- opening direction: right/left
- frame material: aluminium profile
- panel material: door panel


<sup>1</sup> dimension depending on door panel height

WICKETS WITH LOW THRESHOLD = 25MM

WICKETS WITH HIGH THRESHOLD = 130MM

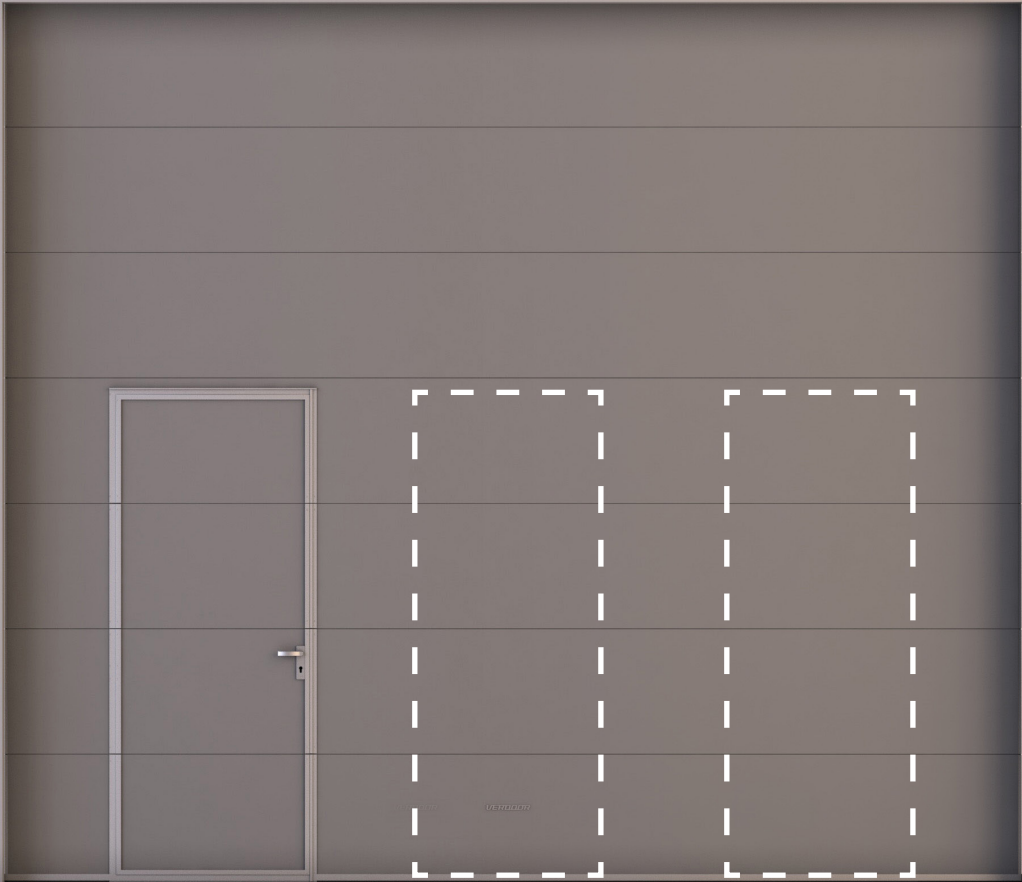

600mm min Any arrangement within this range 600mm min

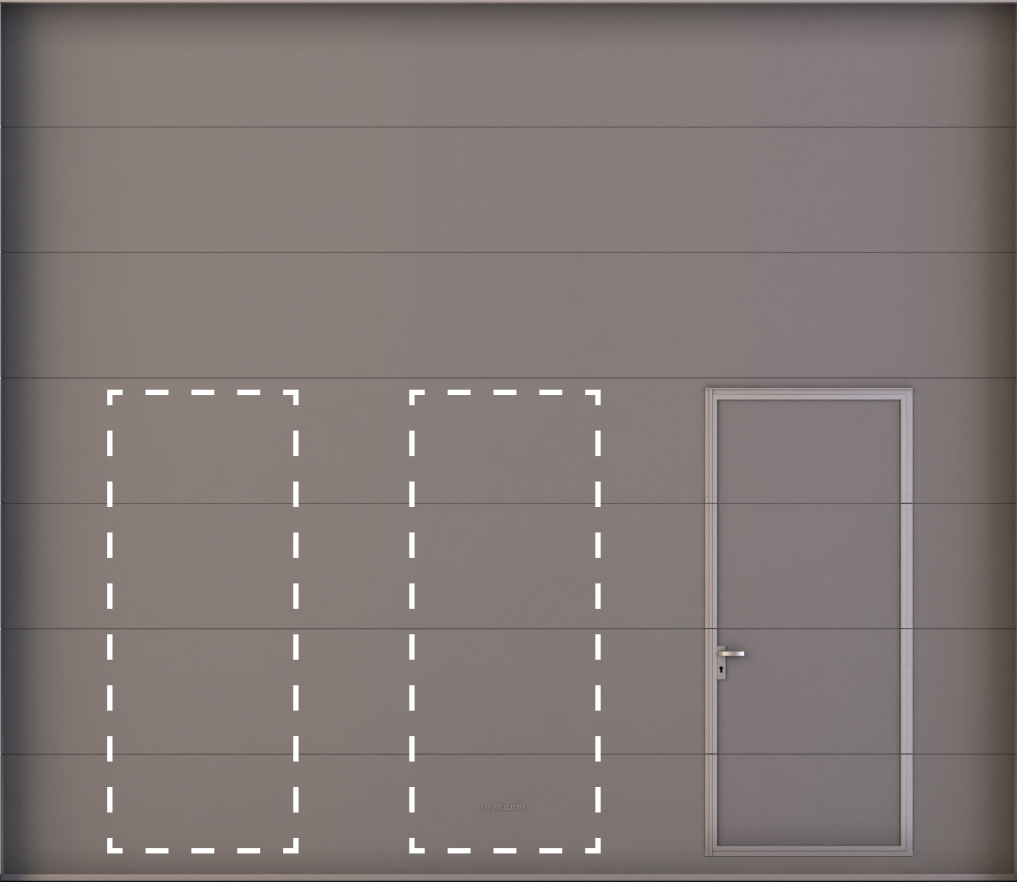

600mm min Any arrangement within this range 600mm min